


HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		


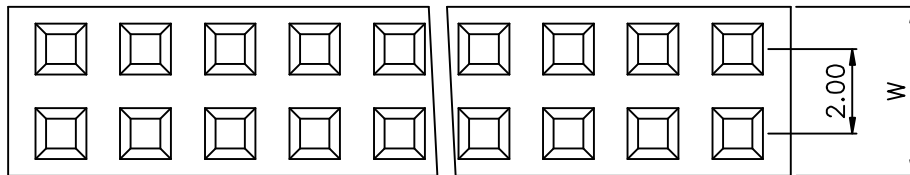


Specifications

1. Current Rating: 2Amps
2. Contact Resistance: 20mΩ
3. Insulator Resistance: 1000 Megohms min.
4. Dielectric withstanding Voltage: AC/DC 500V
5. Operating Temperature: -40°C to +105°C
6. Contact Material: phosphor Bronze
7. Insulator Material: As follows
8. Plated: As follows


Ordering Information

L306 XX -XX 0 X X XX X

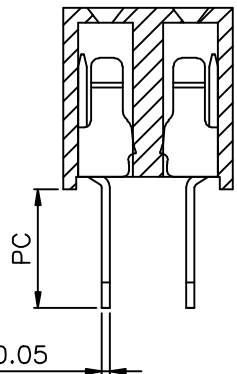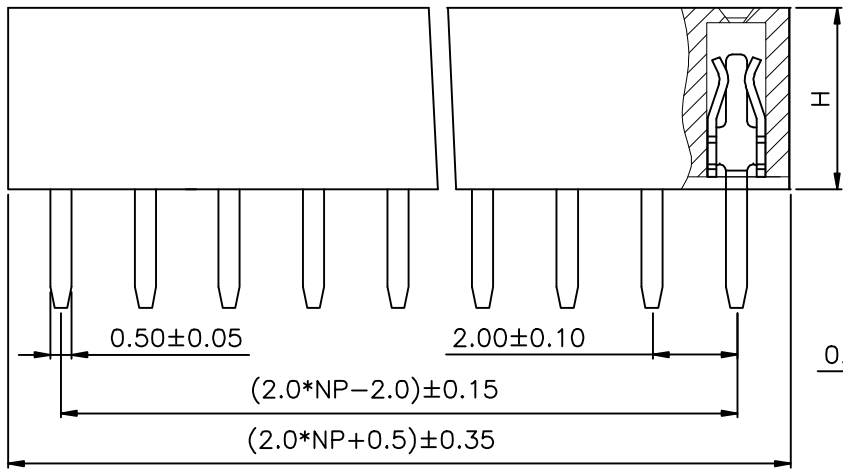

Insulation Height*Wide (H*W)	NO. of Pins Per Row: 1-40P	Insulation Material Option:	Contact Plating	Serial NO.	Packing
22=2.2*4.0		1=PBT	0=0.8" Gold	01-69 (No pillars)	A=PE Bag
40=4.0*W		2=PPS	1=Au1" Gold	70-89 (pillars)	B=Tube
43=4.3*W		3=NY6T	2=Au1.5" Gold	90-99 (outside pillars)	C=Tray
46=4.6*W		4=LCP	3=Au2" Gold		D=Reel
		5=NY66	4=Au3" Gold		
		6=Customized	5=Au5" Gold		
		7=NY46	6=Customized		
		8=NY9T	7=Gold/Tin		
			8=Tin		

Dimension antitheses list			
ITEM	PC	H	W
Standard	2.4/2.8	2.2/4.0/4.3/4.6	4.0/4.5
Alternate			

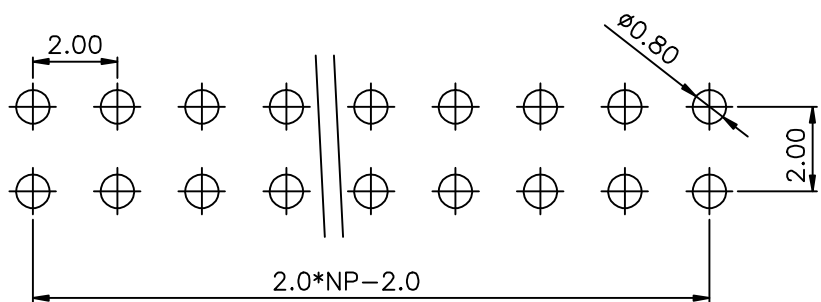

PCB LAYOUT

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

LDCONN 东莞连大精密制品有限公司
DongGuan LianDa Precision Products Co., LTD

TITLE	PH2.0mm 2XNP 180° Dual row Female Header	DRAWN BY	Lujunhui	18.04.01
PART NO	L306XX-XXOXXXXX	CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE	1:1	UNIT	mm	PAGE 1/1
				SIZE A4