
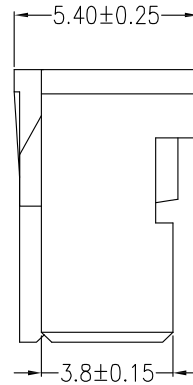


# HSF RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A	—	NEW	11/23-'19	HYJ

Circuit 1

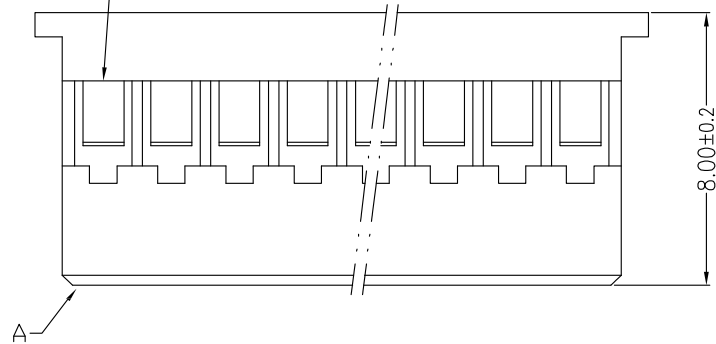

### Main Specifications


Poles: 02 to 15  
 Contact resistance:  $\leq 20m \Omega$   
 Insulation resistance:  $\geq 1000M \Omega$   
 Rated voltage: 250V AC DC  
 Rated current: 3.0A AC DC  
 Withstand Voltage: 1000V AC/minute  
 Temperature Range:  $-25^{\circ}C \sim +85^{\circ}C$

### ORDER INFORMATION:

**L2008Y-XX-A5W-P**

PART No.  
6No. OF CIRCUITS:  
02~15

PACKAGING:  
 P=PE  
 PLASTIC MATERIAL:  
 A5W=PA66 (WHITE)

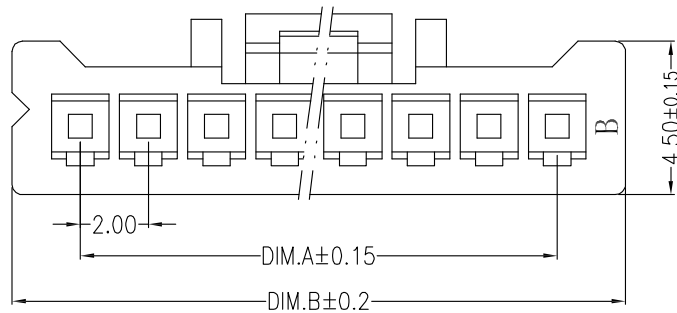

Circuits	Dimensions (mm)	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

ITEM	COMPONENT	Q'TY	MATERIAL	COLOR
A	PEDESTAL	1 PCS	PA66	WHITE

**LDCONN** 东莞连大精密制品有限公司  
 连大 DongGuan LianDa Precision Products Co., LTD

STANDARD TOLERANCE (EXCEPT SPECIFIED)	
LINER	ANGLES
.0 ±0.30	0.° ±3°
.00 ±0.20	.0° ±2°
.000 ±0.10	.00° ±1°

TITLE	L2008Y 2.0MM PITCH Housing	DRAWN BY	HYJ	11/23-'19
PART NO	L2008Y-XX-A5W-P	CHECKED BY		
DRAWING NO	—	APPROVED BY		
SCALE	1:1	UNIT	mm	
PAGE	1/1	SIZE	A4	